

## **PARKING SPACES & PARKING LOT STRIPING COLOR STANDARD**

### **PURPOSE**

1. The general purpose of the Parking Space & Lot Striping Color Standard is to provide a Standard for contractors, A/Es and FM employees to adhere to when painting parking spaces & parking lots located on the CMU campus.
2. This Standard is not to be regarded as a specification but as a document providing uniformity in the completion of painting parking spaces & parking lots in the field.

### **GENERAL**

1. Parking spaces & Parking lots shall be painted as described herein.

### **PRODUCTS**

1. Paint shall conform to the Michigan Department of Transportation “Pavement Marking Material Usage Guidelines”. This can be found online at <http://www.michigan.gov/mdot>.

### **EXECUTION**

1. Parking Lot Striping Color

  |   **Yellow:**      Regular Parking Spaces

  |   **Blue:**       Handicap Parking Spaces

  |   **Yellow:**      Cross Hatches and Non Parking Zones

2. Handicap Parking Spaces

- A. All handicap parking spaces shall be marked with a standard sign designating the space as handicap parking.
- B. All handicap parking spaces shall be painted with the standard wheelchair symbol.
- C. See CMU Standard “Parking Space Detail” attached.

## **PARKING SPACES & PARKING LOT STRIPING COLOR STANDARD**


### **DOCUMENT CONTROL PAGE:**

<b>Document Published:</b>	August 15, 2006
<b>Prepared By:</b>	Dan Methner
<b>Reviewed By:</b>	Linda Slater, John Dillon, John Latoski, Stan Mandziuk, Don McIntyre, Bob Ringel, Jim Jocks, Jay Kahn, Stan Dinius, Tom Prenkert, Crissy Trevino
<b>Approved By:</b>	Steve Lawrence

### **Revision History:**

Date	Revision	Approved By:
9.25.06	Revised to include marking and painting of Handicap Parking Spaces and included standard "Parking Space Detail"	Steve Lawrence
4.1.13	Revised Regular Parking Space color to "Yellow" per email from CMU Parking Services	Steve Lawrence

DRAWING SET INFO	
DRW BLOKATIC DESIGN REVIEW	<input type="checkbox"/>
DRW BLOKATIC DESIGN REVIEW	<input type="checkbox"/>
DRW DESIGN DEVELOPMENT REVIEW	<input type="checkbox"/>
DRW CONSTRUCTION DOC. REVIEW	<input type="checkbox"/>
DRW CONSTRUCTION DOC. REVIEW	<input type="checkbox"/>
DRW AND CONSTRUCTION SET	<input type="checkbox"/>
FINAL RECORD - AS BUILT SET	<input type="checkbox"/>
FOR REFERENCE ONLY	<input type="checkbox"/>
ORIGINAL	<input type="checkbox"/>
COPY	<input type="checkbox"/>
DRAWN BY _____	
CHECKED BY _____	
APPROVED BY _____	
REVISIONS	
▲ DATE	DESCRIPTION
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
DRW CREATED 9.25.2006	
SCALE 1:1	
ACAD FILE	
PLOT DATE	
SHEET NO.	
C-1	
CMU PROJECT NO.	

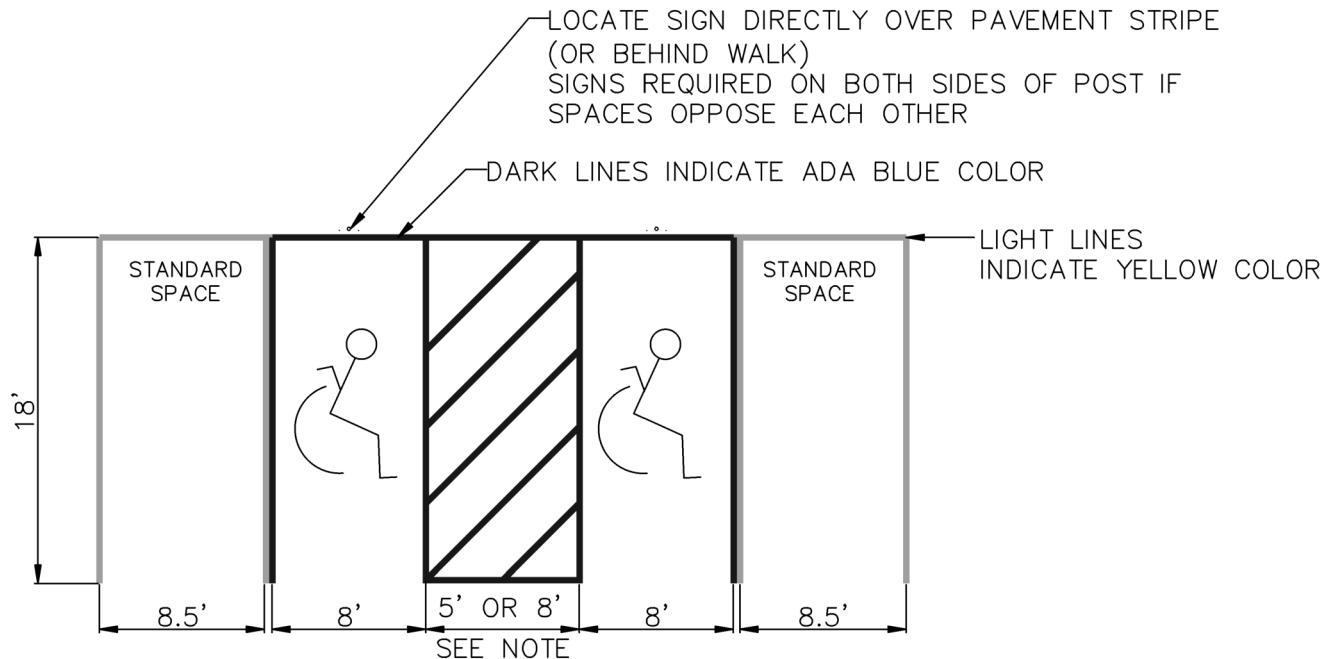

NOTE:

USE 5' – FOR REGULAR HANDICAP SPACE  
USE 8' – FOR VAN ACCESSIBLE SPACE


VAN ACCESSIBLE SPACES SHALL BE ADJACENT  
TO 8' WIDE NO-PARKING AREAS AND SHALL  
INCLUDE AN ADDITIONAL SIGN READING "VAN  
ACCESSIBLE". SEE SIGN DETAILS.

LINES SHALL BE 4" WIDE, PAINT SHALL CONFORM  
TO THE MICHIGAN DEPARTMENT OF TRANSPORTATION  
"PAVEMENT MARKING MATERIAL USAGE GUIDELINES"

PARKING SPACES DETAIL

NOT TO SCALE

ADD THIS SIGN TO  
ALL VAN ACCESSIBLE  
PARKING SPACES

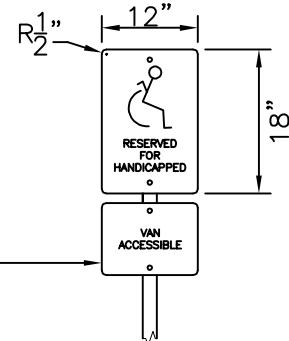

SIGN FACE DETAILS

NOT TO SCALE